## MARION COUNTY SURVEYOR'S OFFICE

DEBRA S. JENKINS MARION COUNTY SURVEYOR SECTION CORNER RECORD SEC.  $9\,\text{TWN}$ .  $15\,\text{n}$  RNG.  $5\,\text{e}$ 

BRYAN F. CATLIN, PLS TECHNICAL SUPERVISOR


Date: 4-09-09


Party Chief: Wilcoxen Crew: Greene / Finney Type of Marker: Fd Harrison

Method of Establishment: County: 4-25-98

IN S.P.C. E Zone, NAD 83

Name: 15050904 N: 501197.0490 (m) E: 72282.3770 (m)



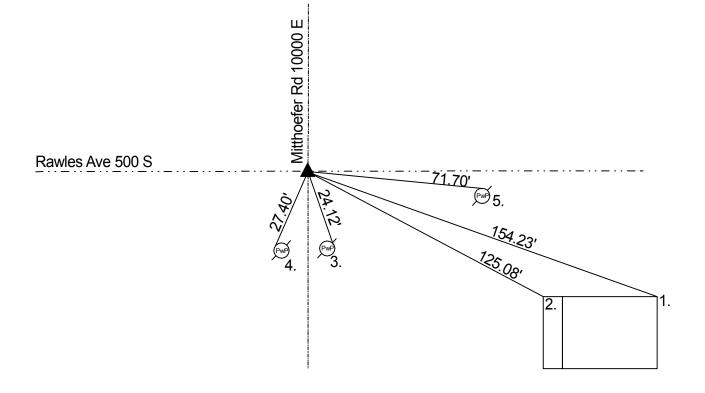

Original post set 1820 by Hendricks with witnesses: 22" beech S 20 E 23 links, 18" dogwood N 27 W 11 links per Marion County Atlas pg. 14. Hosbrook 9-29-1852 called no stone but witness: 30" beech N 74 W 38 links, 6" poplar S 56 E 20 links per Warren Township Legal Survey Book pg. 28. Hosbrook 3-20-1860 called no stone but witness per previous Hosbrook survey per Warren Township Legal Survey Book pg. 27. Cathcart 6-8-54 called same. Burres 8-14-63 called same. McLand 2-5-69 called PK nail. Fortner 1-16-75 called railroad spike. Hiselman 12-4-75 called same. Greene 4-12-93 called same. Wilcoxen 6-30-93 called same. Excavated by Wilcoxen 4-25-98 and railroad spike found 3" down. Stone found 13" down under railroad spike. Harrison set. Re-tied 5-9-03 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	154.23'	NE corner of Address 513
2.	125.08'	NW corner of porch
3.	24.12'	PK nail SW PwP#61-581 C 2"up
4.	27.40'	PK nail NW PwP#38-581 B 24"up
5.	71.70'	Mag nail w/ brass washer N.side PwP #24-581-C 24" up